


Wood

TECHNICAL DATA

Thermic Power (at min-at max)	kW	0,0 - 6,2
Introduced thermal power (at max)	kW	7,4
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	74
Useful efficiency (at min-at max)	%	0 - 84
Heating surface (at min-at max)	m ²	0 - 65
CO ₂ (min-max)	%	0,0 - 6,8
Emissions CO (13% O ₂) (at min-at max)	mg/Nm ³	0 - 1209
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm ³	0 - 69
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm ³	0 - 78
Dust content at 13% O ₂ (at min-at max)	mg/Nm ³	0 - 29.8
Combustible Legna	mm	max L 330
Hopper capacity	kg	0
Hourly consumption (at min-at max)	kg/h	0,0 - 1,7
Autonomy (at min-at max)	h	0 - 0
Ignition electrical absorption (at max)	W	0
Operating electrical absorption (at max)	W	0
Chimney flue depression (at min-at max)	Pa	0 - 12
Mass of smoke (at min-at max)	g/sec	0,0 - 7,3
Exhaust fumes temperature (at min-at max)	°C	0 - 168
Distance from material comb. (back/side/under)	mm	40 / 2.5 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	140
Combustion air inlet (B)	Ø mm	80
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS

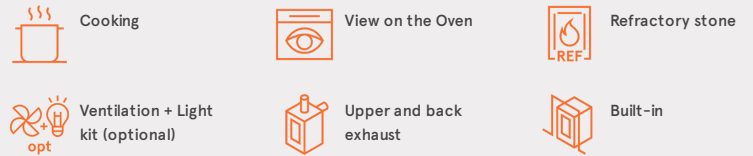

AVAILABLE FINISHES

71220009		Stainless Steel	EAN 8053859016298
71220010		Steel Anthracite	EAN 8053859016304
71220011		Steel White	EAN 8053859016311
71220012		Steel Black	EAN 8053859016328

OPTIONAL

5018015	TOP	EAN 8053859012863
5021005	CONNECTOR PIPE 140-150MM	EAN 8053859014256

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen



EN 12815:2001/
A1:2004/AC:2007



STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	103	81
	Volume (m ³)	0,67	
	Gross weight (kg)	135.8	
	Net weight (kg)	121.6	

STORAGE

	N° (max)
	1
MAX 1	

TRANSPORT

48 pz