


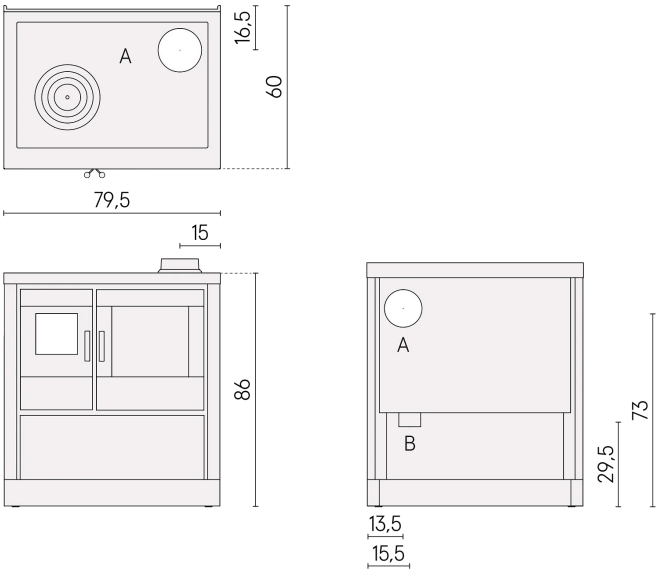

Wood

TECHNICAL DATA

Thermic Power (at min-at max)	kW	0,0 - 7,5
Introduced thermal power (at max)	kW	9,5
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	73
Useful efficiency (at min-at max)	%	0 - 83
Heating surface (at min-at max)	m²	0 - 79
CO ₂ (min-max)	%	0,0 - 9,2
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	0 - 916
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	0 - 29
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	0 - 95
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	0 - 27
Combustible Legna	mm	max L 330
Hopper capacity	kg	0
Hourly consumption (at min-at max)	kg/h	0,0 - 2,2
Autonomy (at min-at max)	h	0 - 0
Ignition electrical absorption (at max)	W	0
Operating electrical absorption (at max)	W	0
Chimney flue depression (at min-at max)	Pa	0 - 12
Mass of smoke (at min-at max)	g/sec	0,0 - 6,9
Exhaust fumes temperature (at min-at max)	°C	0 - 264
Distance from material comb. (back/side/under)	mm	40 / 2,5 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	140
Combustion air inlet (B)	Ø mm	80
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS

Cooking	View on the Oven	Refractory stone
Ventilation + Light kit (optional)	Upper and back exhaust	Built-in

AVAILABLE FINISHES

71220001		Stainless Steel	EAN 8053859016212
71220002		Steel Anthracite	EAN 8053859016229
71220003		Steel White	EAN 8053859016236
71220004		Cast Iron	EAN 8053859016243

OPTIONAL

5021005	CONNECTOR PIPE 140-150MM	EAN 8053859014256
5013003	TOP	EAN 8033123613361

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 12815:2001/
A1:2004/AC:2007
CE



A+

STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	103	98

Volume (m³)	0,81
-------------	------

Gross weight (kg)	153.8
-------------------	-------

Net weight (kg)	138.2
-----------------	-------

STORAGE

	<table><tr><td>N° (max)</td></tr><tr><td>1</td></tr></table>	N° (max)	1
N° (max)			
1			

TRANSPORT

39 pz